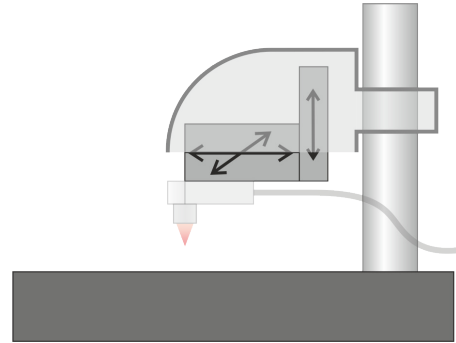


# PICOSCALE Vibrometer XYZ Positioning stage PV-XYZ-V1.0



**Figure 1.** Schematic drawing of the 3D positioning system mounted on the default base with post. The 3 positioners are arranged such that the sensor head (mounted on the lowest positioner) can be moved with 3 degrees of freedom.

The XYZ positioning stage is intended for use with the **PICOSCALE Vibrometer**. The system is used to position and to scan the laser beam of the interferometer over the sample. The positioning system is mounted on a 25 mm diameter post so that its height is easily adjusted to accommodate samples of different dimensions. It is even possible to remove the positioning system from its mounting post in order to install it in a custom setup or to combine it with another instrument.

## SPECIFICATIONS

The positioning system is built around three SmarAct closed-loop positioners enclosed in a compact protective housing. Figure 1 shows a simplified drawing of the XYZ positioning system. The specifications are given in Table 1. In its standard configuration, the positioning system is mounted on a 25 mm diameter post which is secured on a granite base (Table 2). If the 20 mm range of the Z-positioner is not sufficient, the height of the whole positioning system can be adjusted by moving it along the post (this requires a 2.5 mm hex key). It is also possible to remove the YXZ positioning system from the standard post in order to mount it on a customized system.

Note, that when an XYZ positioning system is connected to stage controller for the first time, the position sensors need to be calibrated and referenced. Detailed instructions are provided in the control software manual.

**Table 1.** Specifications of the XYZ positioning stage.

Property	Value
Positioner type <sup>1</sup>	3 x CLS-3232 linear stage
Scan range [mm]	20
Position resolution [nm]	1
Position repeatability [nm]	±50
Noise level <sup>2</sup> [dB(A)]	<73
Dimensions W x L x H [cm]	5.5 x 11 x 7.5
Weight [kg]	0.5

<sup>1</sup> See CLS-3232 specification sheet, available at SmarAct Metrology GmbH & Co. KG, for further information.

<sup>2</sup> Measured at 50 cm distance.

**Table 2.** Specifications of base with mounting post.

Property	Value
Material base	Granite
Dimensions base [cm]	15 x 20 x 4
Material post	Inox
Dimensions post $\varnothing$ x H [cm]	2.5 x 15.5
Weight [kg]	4.8

## ORDER CODES

The order codes of the **PICOSCALE Vibrometer** 3D positioning system and the base with mounting post are given in Table 3. The sensor head is not part of the assembly and needs to be ordered separately.

**Table 3.** Order codes for the **PICOSCALE Vibrometer 3D positioning system**.

Order code	Description
PV-XYZ-V1.0	<b>PICOSCALE Vibrometer</b> 3D positioning system, 20 mm range
PV-BS-01	Base with post
PV-ACC-CAP-01	Fabric dust cover for 3D positioning system

## Contact

### Germany

**SmarAct Metrology GmbH & Co. KG**

Rohdenweg 4  
D-26135 Oldenburg  
Germany

T: +49 (0) 441 - 800879-0  
Email: metrology@smaract.com  
www.smaract.com

### France

**SmarAct GmbH**

Schuetten-Lanz-Strasse 9  
26135 Oldenburg  
Germany

T: +49 441 - 800 879 956  
Email: info-fr@smaract.com  
www.smaract.com

### USA

**SmarAct Inc.**

2140 Shattuck Ave. Suite 302  
Berkeley, CA 94704  
United States of America

T: +1 415 - 766 9006  
Email: info-us@smaract.com  
www.smaract.com

### China

**Dynasense Photonics**

6 Taiping Street  
Xi Cheng District,  
Beijing, China

T: +86 10 - 835 038 53  
Email: info@dyna-sense.com  
www.dyna-sense.com

**Natsu Precision Tech**

Room 515, Floor 5, Building 7,  
No.18 East Qinghe Anning  
Zhuang Road,  
Haidian District  
Beijing, China

T: +86 18 - 616 715 058  
Email: chenye@nano-stage.com  
www.nano-stage.com

**Shanghai Kingway Optech Co.Ltd**

Room 1212, T1 Building  
Zhonggong Global Creative Center  
Lane 166, Yuhong Road  
Minhang District  
Shanghai, China

Tel: +86 21 - 548 469 66  
Email: sales@kingway-optech.com  
www.kingway-optech.com

### Japan

**Physix Technology Inc.**

Ichikawa-Business-Plaza  
4-2-5 Minami-yawata,  
Ichikawa-shi  
272-0023 Chiba  
Japan

T/F: +81 47 - 370 86 00  
Email: info-jp@smaract.com  
www.physix-tech.com

### South Korea

**SEUM Tronics**

# 1109, 1, Gasan digital 1-ro  
Geumcheon-gu  
Seoul, 08594,  
Korea

T: +82 2 - 868 10 02  
Email: info-kr@smaract.com  
www.seumtronics.com

### Israel

**Optics & Motion Ltd.**

P.O.Box 6172  
46150 Herzeliya  
Israel

T: +972 9 - 950 60 74  
Email: info-il@smaract.com  
www.opticsmotion.com

SmarAct Metrology GmbH & Co. KG develops sophisticated equipment to serve high accuracy positioning and metrology applications in research and industry within fields such as optics, semiconductors and life sciences. Our broad product portfolio – from miniaturized interferometers and optical encoders for displacement measurements to powerful electrical nanoprobers for the characterization of smallest semiconductor technology nodes – is completed by turnkey scanning microscopes which can be used in vacuum, cryogenic or other harsh environments.

We maintain the complete production in house for a high level of customization so that we can always provide you the optimal individual or OEM solution. We also offer feasibility studies, measurement services and comprehensive support to accompany you along your projects.

## Headquarters

### **SmarAct GmbH**

Schuetze-Lanz-Strasse 9  
26135 Oldenburg  
Germany

T: +49 441 - 800 879 0  
Email: [info-de@smaract.com](mailto:info-de@smaract.com)  
[www.smaract.com](http://www.smaract.com)

## USA

### **SmarAct Inc.**

2140 Shattuck Ave. Suite 302  
Berkeley, CA 94704  
United States of America

T: +1 415 - 766 9006  
Email: [info-us@smaract.com](mailto:info-us@smaract.com)  
[www.smaract.com](http://www.smaract.com)