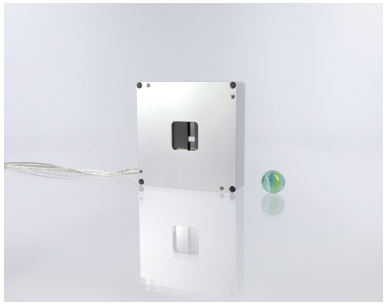


SMS-20-20 - Rectangular Aperture

Four independently movable blades aligned in two parallel pairs oriented rectangular to each other. The setup allows to define the size of the aperture opening independently in width and height with a side length from 0 to 20 mm. Position sensors allow for closed-loop positioning of each blade to precisely define the size and the position of the aperture within the 20 by 20 mm window of the enclosure. Specialized versions are available for the use in high and ultra-high vacuum environments. Customized versions are also available. Please do not hesitate to contact us to discuss your specific requirements. The SMS-20-20 consist of two perpendicular oriented single slits. Fully motorized to precisely define the size and position of the rectangular aperture.

	Mechanical
Dimensions [mm]	85 x 85 x 21
Weight [g]	275
	Open-loop
Velocity [mm/s]	> 20
Open-Loop Resolution [nm]	< 1
	Closed-Loop
Sensor Resolution MCS2 [nm]	1 (S) 4 (L)
Uni-Directional Repeatability MCS2 [nm]	± 40 (S,L)
Sensor Resolution (H)CU [nm]	100 (L)
Uni-Directional Repeatability (H)CU [nm]	± 300 (L)
	Options
Material Options	Steel base (-ST); Titanium base (-TI); Black anodized (-BK)
Vacuum Options	HV (1E-6 mbar); UHV (1E-11 mbar)
Non-Magnetic Option	Yes (-NM)

Copyright © 2026 SmarAct GmbH • All Rights Reserved.
SmarAct GmbH | Schuette-Lanz-Strasse 9 | 26135 Oldenburg | Germany T: +49 441 – 800 879 0 | Email: info-de@smaract.com