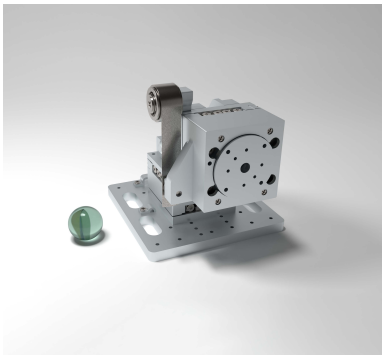


XYZR-XYZ CLS32:32 R SRP32:11

Based on three CLS-3232 linear stages with 21 mm of travel and a SR-3211 rotation stages with continuous rotation and compatible to the SmarAct Modular System it is able to handle payloads of up to 3.3 N.

	Mechanical
Degrees of Freedom	4
Stages used	3 x CLS-3232; 1 x SR-3211
Travel [mm]	21 (X); 21 (Y); 21 (Z)
Travel [°]	unlimited
Payload [N]	3.3
	Closed-Loop
Sensor Resolution MCS2 [nm]	1 (S)
	Breadboard Mount
Dimensions [mm]	79 x 65 x 70 (L x W x H)
Center of vert. Stage above Ground [mm]	43 (32.5 ... 53.5)
	Direct Mount
Dimensions [mm]	62.5 x 45.5 x 65 (L x W x H)
Center of vert. Stage above Ground [mm]	38 (27.5 ... 48.5)

Copyright © 2026 SmarAct GmbH • All Rights Reserved.
SmarAct GmbH | Schuette-Lanz-Strasse 9 | 26135 Oldenburg | Germany T: +49 441 – 800 879 0 | Email: info-de@smaract.com