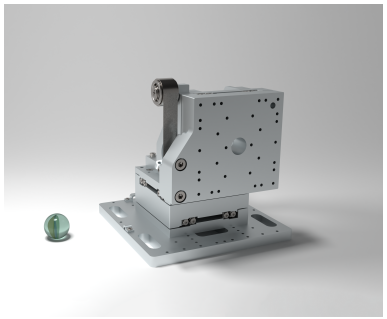


XYZ-CLS52:52

基于三个CLS-5252阶段，行程范围为31毫米。该系统配备恒力弹簧，能够处理高达3.3牛顿的负载，并与SmarAct模块化系统完全兼容。

	Mechanical
Degrees of Freedom	3
Stages used	CLS-5252
Travel [mm]	31 (X); 31 (Y); 31 (Z)
Payload [N]	1.5
	Closed-Loop
Sensor Resolution MCS2 [nm]	1 (S)
	Breadboard Mount
Dimensions [mm]	65 x 65 x 59 (L x W x H)
Center of vert. Stage above Ground [mm]	62 (46.5 ⋯ 77.5)
	Direct Mount
Dimensions [mm]	79 x 63.5 x 89.5 (L x W x H)
Center of vert. Stage above Ground [mm]	56 (40.5 ⋯ 71.5)

生成规格说明书：03.11.2026 -
版权所有 © 2026 SmarAct GmbH • 保留所有权利。
SmarAct GmbH | Schuette-Lanz-Strasse 9 | 26135 Oldenburg | 德国 T: +49 441 – 800 879 0 | 电子邮箱：info-de@smaract.com