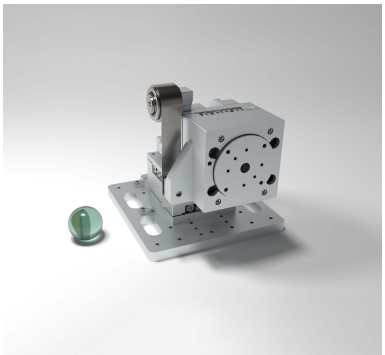


XYZR-XYZ CLS32:32 R SRP32:11

基于三个CLS-3232线性位移台（行程21毫米）和一个SR-3211旋转位移台（支持连续旋转），并兼容SmarAct模块化系统，该系统可处理最大3.3牛顿的负载。

	Mechanical
Degrees of Freedom	4
Stages used	3 x CLS-3232; 1 x SR-3211
Travel [mm]	21 (X); 21 (Y); 21 (Z)
Travel [°]	unlimited
Payload [N]	3.3
	Closed-Loop
Sensor Resolution MCS2 [nm]	1 (S)
	Breadboard Mount
Dimensions [mm]	79 x 65 x 70 (L x W x H)
Center of vert. Stage above Ground [mm]	43 (32.5 ⋯ 53.5)
	Direct Mount
Dimensions [mm]	62.5 x 45.5 x 65 (L x W x H)
Center of vert. Stage above Ground [mm]	38 (27.5 ⋯ 48.5)

生成规格说明书：04.11.2026 -
版权所有 © 2026 SmarAct GmbH • 保留所有权利。
SmarAct GmbH | Schuette-Lanz-Strasse 9 | 26135 Oldenburg | 德国 T: +49 441 – 800 879 0 | 电子邮箱：info-de@smaract.com